

UNCLASSIFIED

AD NUMBER

AD489935

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; 07 OCT 1966. Other requests shall be referred to Defense Advanced Research Projects Agency, 675 North Randolph Street, Arlington, VA 22203-2114. This document contains export-controlled technical data.

AUTHORITY

USAF ltr, 25 Jan 1972

THIS PAGE IS UNCLASSIFIED

RAYLEIGH WAVE REJECTION BY OPTIMUM FILTERING OF VERTICAL ARRAYS

7 October 1966

Prepared For

AIR FORCE TECHNICAL APPLICATIONS CENTER

Washington, D. C.

By

William C. Dean

RAPIER SCIENCES DIVISION
TELEDYNE INDUSTRIES, INC.

Under

Project VELA UNIFORM

Sponsored By

ADVANCED RESEARCH PROJECTS AGENCY
Nuclear Test Detection Office
ARPA Order No. 624

**BEST
AVAILABLE COPY**

RAYLEIGH WAVE REJECTION BY OPTIMUM FILTERING
OF VERTICAL ARRAYS

SEISMIC DATA LABORATORY REPORT NO. 166

AFTAC Project No.:	VELA T/6702
Project Title:	Seismic Data Laboratory
ARPA Order No.:	624
ARPA Program Code No.:	5810
Name of Contractor:	EARTH SCIENCES DIVISION TELEDYNE INDUSTRIES, INC.
Contract No.:	AF 33(657)-15919
Date of Contract:	18 February 1966
Amount of Contract:	\$ 1,842,884
Contract Expiration Date:	17 February 1967
Project Manager:	William C. Dean (703) 836-7644

P. O. Box 334, Alexandria, Virginia

AVAILABILITY

This document is subject to special export controls and each transmittal to foreign governments or foreign national may be made only with prior approval of Chief, AFTAC.

This research was supported by the Advanced Research Projects Agency, Nuclear Test Detection Office, under Project VELA-UNIFORM and accomplished under the technical direction of the Air Force Technical Applications Center under Contract AF 33(657)-15919 .

Neither the Advanced Research Projects Agency nor the Air Force Technical Applications Center will be responsible for information contained herein which may have been supplied by other organizations or contractors, and this document is subject to later revision as may be necessary.

TABLE OF CONTENTS

<u>SECTION</u>		<u>PAGE</u>
	ABSTRACT	
I	THEORY	1
II	SYNTHETIC EXAMPLE	6
III	EXAMPLE WITH UBO NOISE AND A SYNTHETIC SIGNAL	9
IV	CONCLUSIONS	11
	REFERENCES	13

LIST OF FIGURES

Figure No.

- 1 UBO Well Log, Schematic, and Dispersion Curves
- 2 $H_{km}(\omega)$ Frequency Responses of Rayleigh Modes for the five Seismometers in the UBO Array. (Responses are relative to a surface seismometer).
- 3 Optimum Filters Estimating Four Modes (the Signal and Three Rayleigh Modes) from Synthetic Data with the Signal only Present.
- 4 Optimum Filters Estimating Four Modes (the Signal and Three Rayleigh Modes) from Synthetic Data with only Two Modes Present.
- 5 Optimum Filters Estimating Four Modes (the Signal and Three Rayleigh Modes) from Synthetic Data with only Three Modes Present.
- 6 Optimum Filters Estimating Four Modes (the Signal and Three Rayleigh Modes) from Synthetic Data with all Four Modes Present.
- 7 Several sets of optimum filters are applied to UBO noise data with a synthetic signal. The more modes a set of optimum filters estimates, the larger the filter gains, and the more errors are amplified. The data contain considerable energy above 0.5 cps for which the filters are not designed. As a result low frequency errors are large.

ABSTRACT

Rayleigh Wave Rejection by Optimum Filtering of Vertical Arrays

By

Wm. C. Dean

Optimum array processes such as the maximum likelihood filters are usually derived from the cross correlation matrix of the time series outputs of the array. With a vertical array, however, the correlations of both the incoming P-wave signals and Rayleigh wave noise are predictable from the structure. This paper presents the theory of maximum likelihood filters in vertical arrays which can provide undistorted estimates of the signal or the various Rayleigh modes with the other modes cancelled out.

The performance of these optimum processes will be dependent upon the validity of the underlying assumptions such as horizontal bedding, known instrument calibration, and knowledge of both P and S velocities with depth. Examples are shown of the performance of the optimum filters using synthesized data where the underlying assumptions are satisfied. Then these same optimum filters are applied to data from the UBO vertical array.

I. THEORY

Vertical arrays offer some intriguing advantages over other arrangements of seismometers. Assuming the noise to be composed of Rayleigh waves and perhaps some mantle-propagating P-waves, and assuming the signals to be teleseismic P-waves, the noise and signals will be recorded by a vertical array with some rather special characteristics.

We can imagine that each mode of Rayleigh wave noise possesses a random character common to noise functions in general. However for each Rayleigh wave mode the response versus depth and frequency relative to its response on the surface is predictable. Because the relative depth variation is predictable, the vertical array can be summed to cancel the Rayleigh modes. In contrast the noise over a surface array is more unpredictable and more variable and, therefore, more difficult to cancel by array summation.

Normally we compute the attenuation of each Rayleigh wave mode relative to the surface continuously with the depth for several particular frequencies.^{1,2,3,4,5,6} We are thus calculating mode attenuation (and sign) versus depth with frequency as a parameter. However, we could convert many such computations into attenuation versus frequency with depth as a parameter. Naturally, the particular depths we choose would be the levels where a seismometer was recording in the vertical array. In this manner we can compute a frequency response, $H_{km}(\omega)$, where

$$H_{km}(\omega) = \frac{\text{response at the } m\text{th depth}}{\text{response at the surface}} \quad (1)$$

for the k th higher mode. These Rayleigh modes must obey these frequency relationships, $H_{km}(\omega)$, not only in an average sense integrated over time, but also in a transient sense for each instant of time. Otherwise these noise modes would not be surface waves.

The waveform for any of the modes at depth will be either in phase or 180° out of phase with that at the surface. Hence the filter response, $H_{km}(\omega)$, will be an even, real function as must its transform in the time domain. In other words, these filters are phaseless.

In a similar way teleseismic signals, and whatever mantle P-wave noise may be present, will possess very definite delay (i.e., filter) relationships between the various outputs of a vertical array. Let us assume that the signal waveform, $s(t)$, is the same at all levels and further that the surface reflection coefficient is unity and the reflected waveform is the same as the incident waveform. Then if the signal recording on the surface is $2s(t)$, the signal recording from the m th level seismometer is given by

$$z_m(t) = s(t + T_m) + s(t - T_m) \quad (2)$$

where T_m is the one way travel time for the signal from the m th level to the surface. The frequency equivalent of the above time equation is

$$Z_m(\omega) = S(\omega) \quad 2 \cos(\omega T_m). \quad (3)$$

Thus, similar to that applied to the Rayleigh modes, the filtering applied to the signals is also phaseless.

We will define the noise mode, n_k , as follows:

n_1 = the signal mode, s , plus any mantle P-wave noise with velocity and reflection properties identical to those of the signals;

n_2 = the fundamental Rayleigh mode

n_3 = the first higher Rayleigh mode

n_k = the $k-2$ higher Rayleigh mode

The composition of each of the vertical array outputs is given by

$$\begin{aligned} z_1(t) &= \sum_k h_{1k}(\tau) * n_k(t) ; & Z_1(\omega) &= \sum_k H_{1k}(\omega) N_k(\omega) \\ z_2(t) &= \sum_k h_{2k}(\tau) * n_k(t) ; & Z_2(\omega) &= \sum_k H_{2k}(\omega) N_k(\omega) \\ &\vdots & &\vdots \\ z_m(t) &= \sum_k h_{mk}(\tau) * n_k(t) ; & Z_m(\omega) &= \sum_k H_{mk}(\omega) N_k(\omega). \end{aligned} \quad (4)$$

where these equations can be expressed either as functions of frequency, ω , or time, t . For time equations, the operation (*) implies convolution between the h 's and the n 's. The first recording level, $z_1(t)$, may be, but is not necessarily on the surface of the ground.


In matrix form we have

$$Z = HN. \quad (5)$$

The vector of vertical array outputs, Z , is measured. The matrix of filter relations, H , is computable from the structure. The problem is to determine each member of the unknown vector of noise modes, n , by a filtering process just as a seismometer would record the mode on the surface with the other modes absent.

If the number, m , of recording levels is less than the number, k , of noise modes present, (m, k) , then the system is underdetermined. In this case the noise modes cannot all be separated from each other. If $m = k$, we have a determined system with just enough recording levels to find all modes. If the number of recording levels is greater than the number of modes present, the system is overdetermined. In this case all modes can be separated with the extra

measurements used to overcome the effects failure of assumptions, errors in calibrations, and instability of the optimum filters. The following schematic illustrates the optimum filters, G_{1k} :

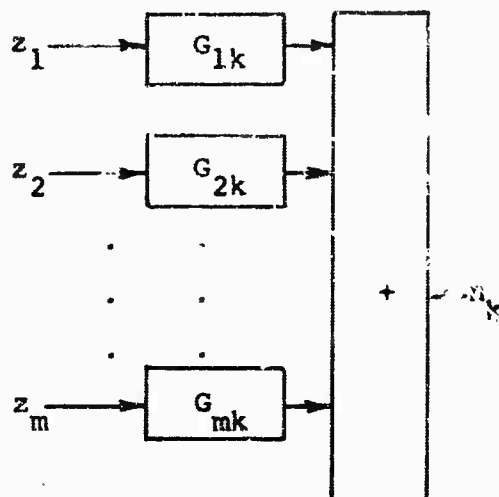

Each of the m input channels must be filtered and these results added to produce each desired noise mode in the output. Thus the solution leads to a matrix rather than a vector of optimum filters.

The filtering operation is therefore

$$GZ = GHN = IN = N \quad (6)$$

where I is the identity matrix. The solution $G = H^{-1}$ will not do since we especially want to find solutions when H is not square. Consequently, we let

$$G = (H^T H)^{-1} H^T \quad (7)$$

for which the operation GZ gives

$$GZ = (H^T H)^{-1} H^T HN = IN = N \quad (8)$$

as desired.

Our method will be to solve these equations for the optimum filter matrix, $G(\omega)$, in frequency for several reasons. First, the

well log analysis yields the $H(\omega)$ filter matrix for the Rayleigh modes in terms of period or frequency.^{2,3,4} Second, not all Rayleigh modes are present at all frequencies. For example, only the fundamental mode can be expected to exist at the lowest frequencies. Finally, the solutions of the matrix equations are independent of each other at the different frequencies. Thus the inversions of the matrices which are not expected to be larger than 10×10 are readily handled on even the smaller digital computers.

II. SYNTHETIC EXAMPLE

A vertical array of five vertical component seismometers existed in a well at the Uinta Basin Seismological Observatory (UBSO). Figure 1 shows a schematic diagram of the seismometer placement in the vertical array and the log of the surrounding lithology. The Rayleigh dispersion curves, also shown on Figure 1, indicate that the fundamental, first, and second higher Rayleigh modes will all be supported over the signal frequency range of 0.5 to 2.0 cps. Since we want more recording levels than modes, these three Rayleigh modes plus a signal mode will be the only ones considered to exist in our synthetic modeling of this well.

The Rayleigh wave dispersion analysis of this well log leads to the mode-depth frequency responses, $H_{km}(\omega)$, defined by equation (1).

Figure 2 shows plots of these filter responses for the first three Rayleigh modes relative to the responses at the surface of the ground.

The optimum filter, G , solutions are the least squares inverse to the Rayleigh signal filter matrix H . Thus the matrix products of G and H gives the identity matrix as shown in equations (6) and (8) $GH = I$. In our test model we have assumed the signal exists with the same size and amplitude on all traces. In other words, we are neglecting ghosting. We have derived optimum filter solutions only over the signal range of 0.5 to 2.0 cps. For the frequencies below 0.5, we have smoothed the frequency responses to zero according to a sinusoidal gain function for both the H and G frequency responses. We have smoothed these responses to zero in a similar way over the range from 2 to 5 cps.

UBO Well
Well Log

Velocities km/sec. density

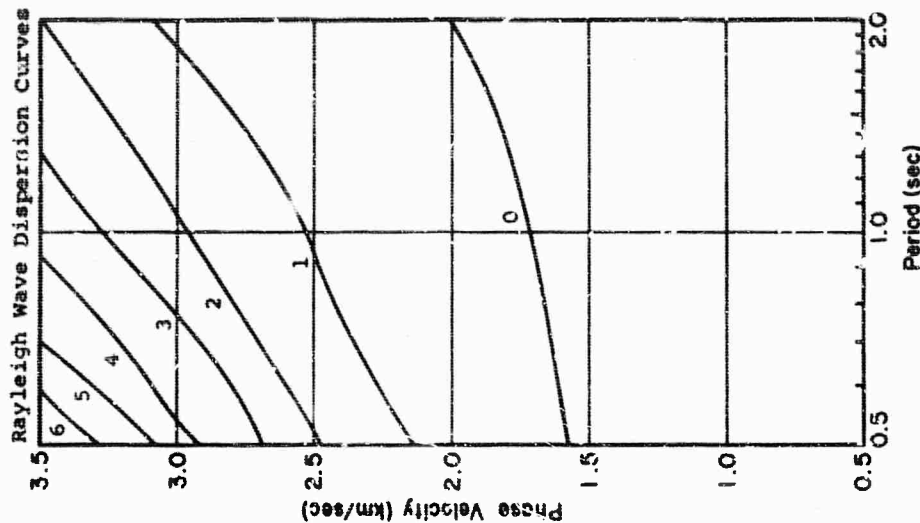
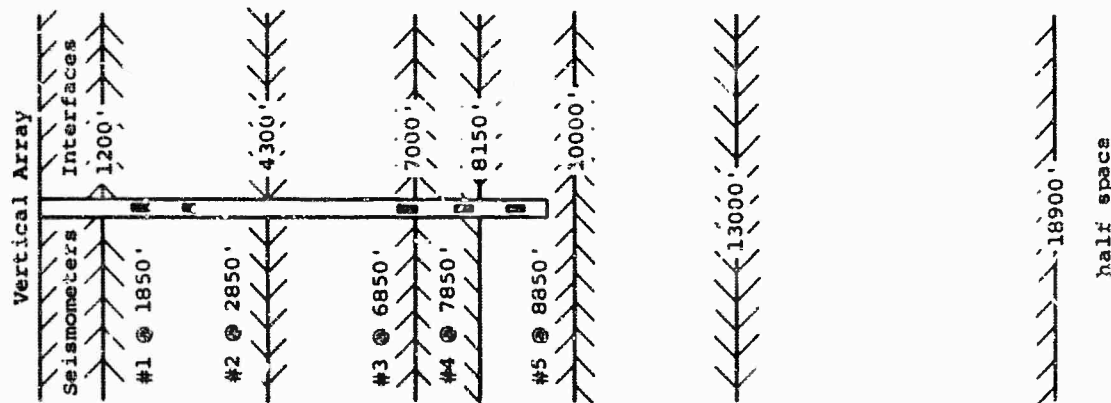


Figure 1. UBO Well Log, Schematic and Dispersion Curves

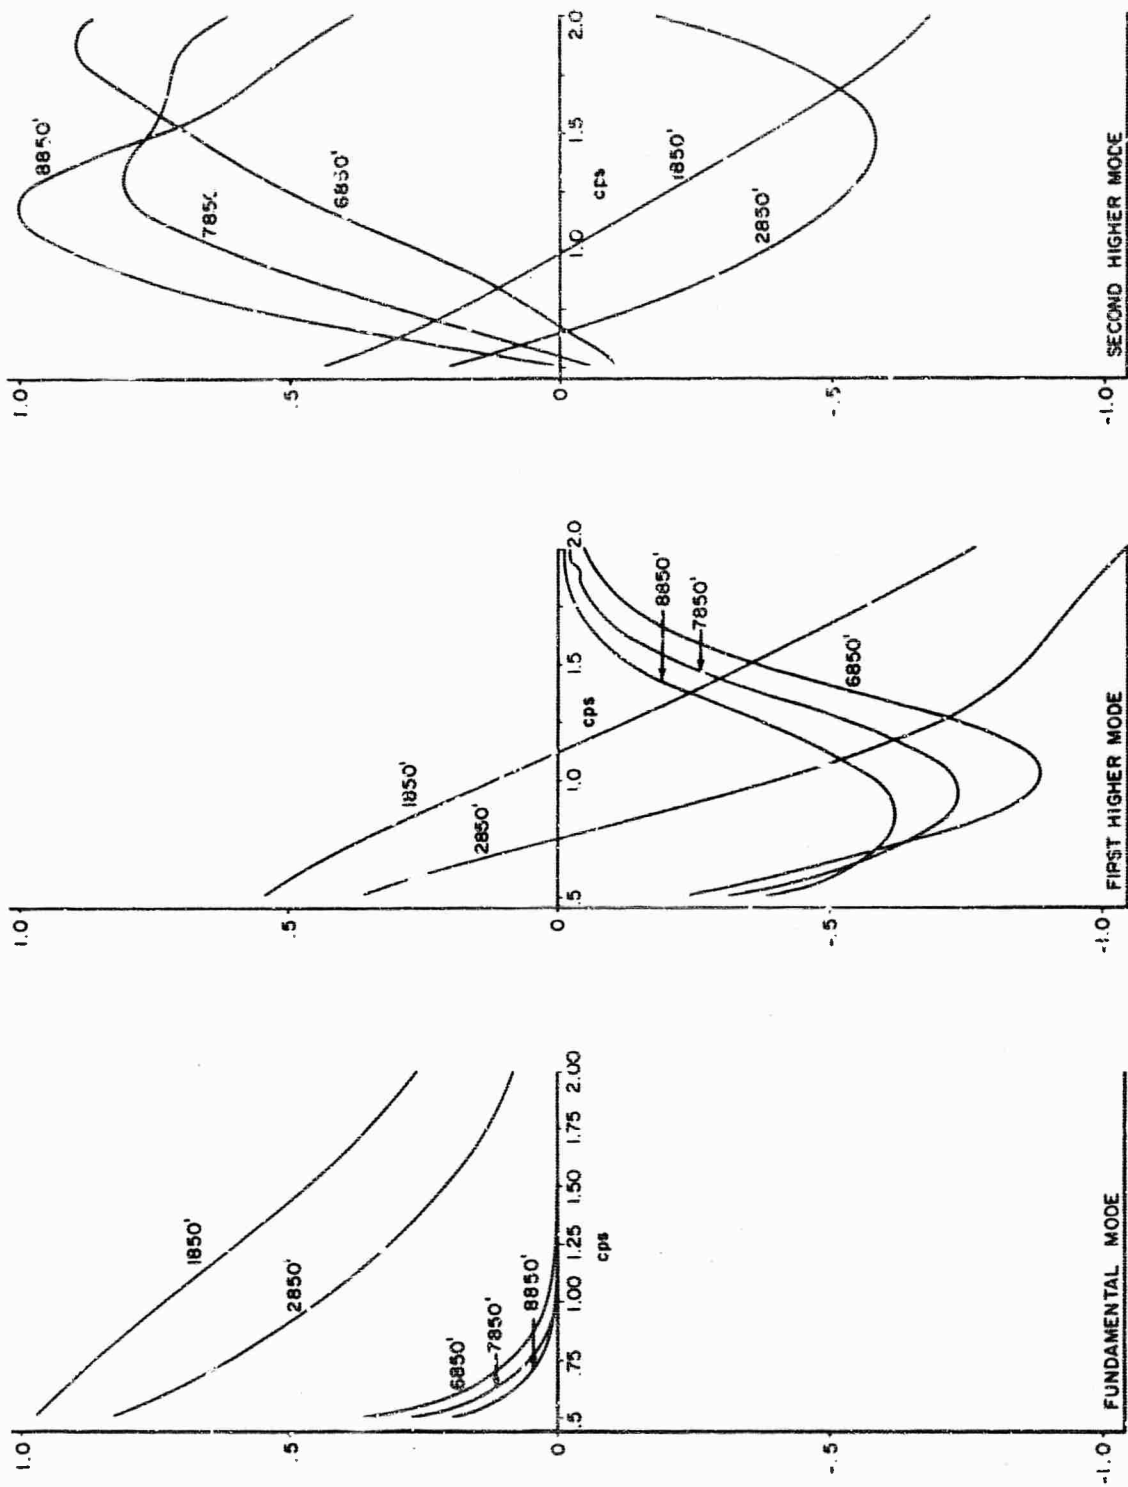


Figure 2. $H_{jk}(\omega)$ Frequency Responses of Rayleigh Modes for the Five Seismometers in the UBO Array. (Responses are relative to a surface seismometer)

In our computations the zeros in the identity matrix are less than 1×10^{-6} . Below 0.5 and above 2.0 cps the GH product still gives zeros in the off diagonal elements. The H matrix assumed below 0.5 and above 2.0 cps is (aH) where the scalar, a, is the cosine function of frequency. In the same way the solution assumed for the optimum filters in this range is (aG). Consequently, the matrix product of these frequencies is given by

$$aG aH = a^2 I \quad (9)$$

Consequently, the orthogonality of our optimum filter solutions is maintained over the entire frequency range.

In order to demonstrate that our optimum filter solutions are indeed correct, we created some synthetic data which does conform to the well log analysis we have assumed for the UBO well. We chose four independent seismograms from our digital data files. We bandpass filtered each so that the main energy content was between 0.5 and 2.0 cps. The first of these traces was identified as the fundamental mode on the surface of the ground and filtered according to the H matrix to produce the equivalent fundamental mode at the various instrument depths in the UBO well. The second trace was identified as the first higher mode and similarly filtered according to its depth behavior determined by the H matrix. The third was identified as the second higher mode, and so on. These Rayleigh mode traces we combine with an artificial signal to produce a mixture of signal and Rayleigh modes expected from this well.

Figure 3 shows the data from the five levels of the vertical array if the signal only were present. The companion traces on Figure 3 show the optimum filter output (estimate) for the signal, the fundamental, the first higher, and second higher modes.

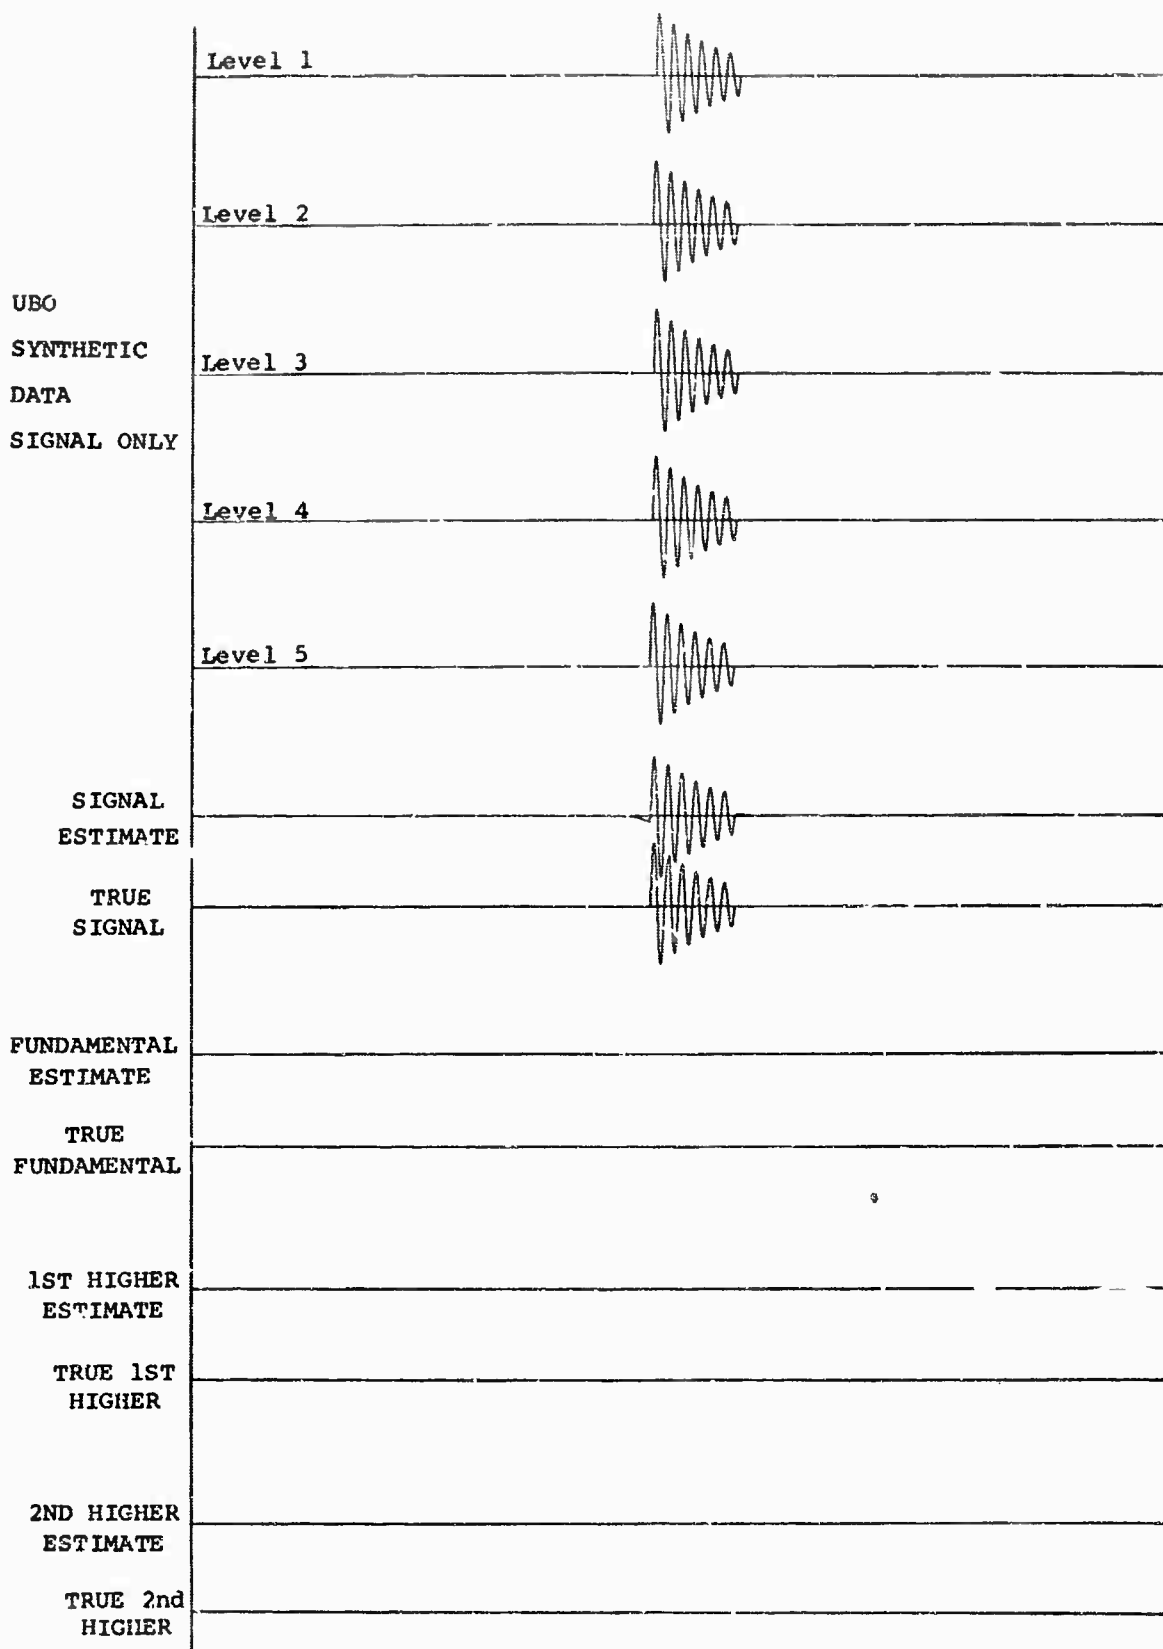


Figure 3. Optimum Filters Estimating Four Modes (the Signal and Three Rayleigh Modes) from Synthetic Data with the Signal Only Present.

Immediately below each optimum filter estimate is the true noise or signal mode that a seismometer would see on the surface if the other modes were not present. The distortion of the signal is slight and can be attributed to the bandpass properties of our optimum filter solutions. The Rayleigh mode outputs should be zero and, in fact, are less than 7×10^{-5} everywhere.

Figure 4 is similar to Figure 3 except that the data contains the signal plus the fundamental mode. As can be seen, the optimum filter outputs agree in size and waveform with the true surface responses of the signal and the fundamental Rayleigh mode.

Figure 5 is similar to Figures 3 and 4 except that the data contains the signal plus the fundamental and first higher Rayleigh modes. Again, all three modes present are reproduced in size and wave shape. The output trying to produce the second higher mode, which is absent, has no value greater than 1×10^{-4} .

Figure 6 is similar to the previous three except that the second higher mode has been added into the vertical array data. Again, the outputs for the signal and the three Rayleigh modes are reproduced in size and waveform within a few percent of the expected results. The signal trace shows better than a 20 db improvement over the best signal/noise ratio available in the vertical array.

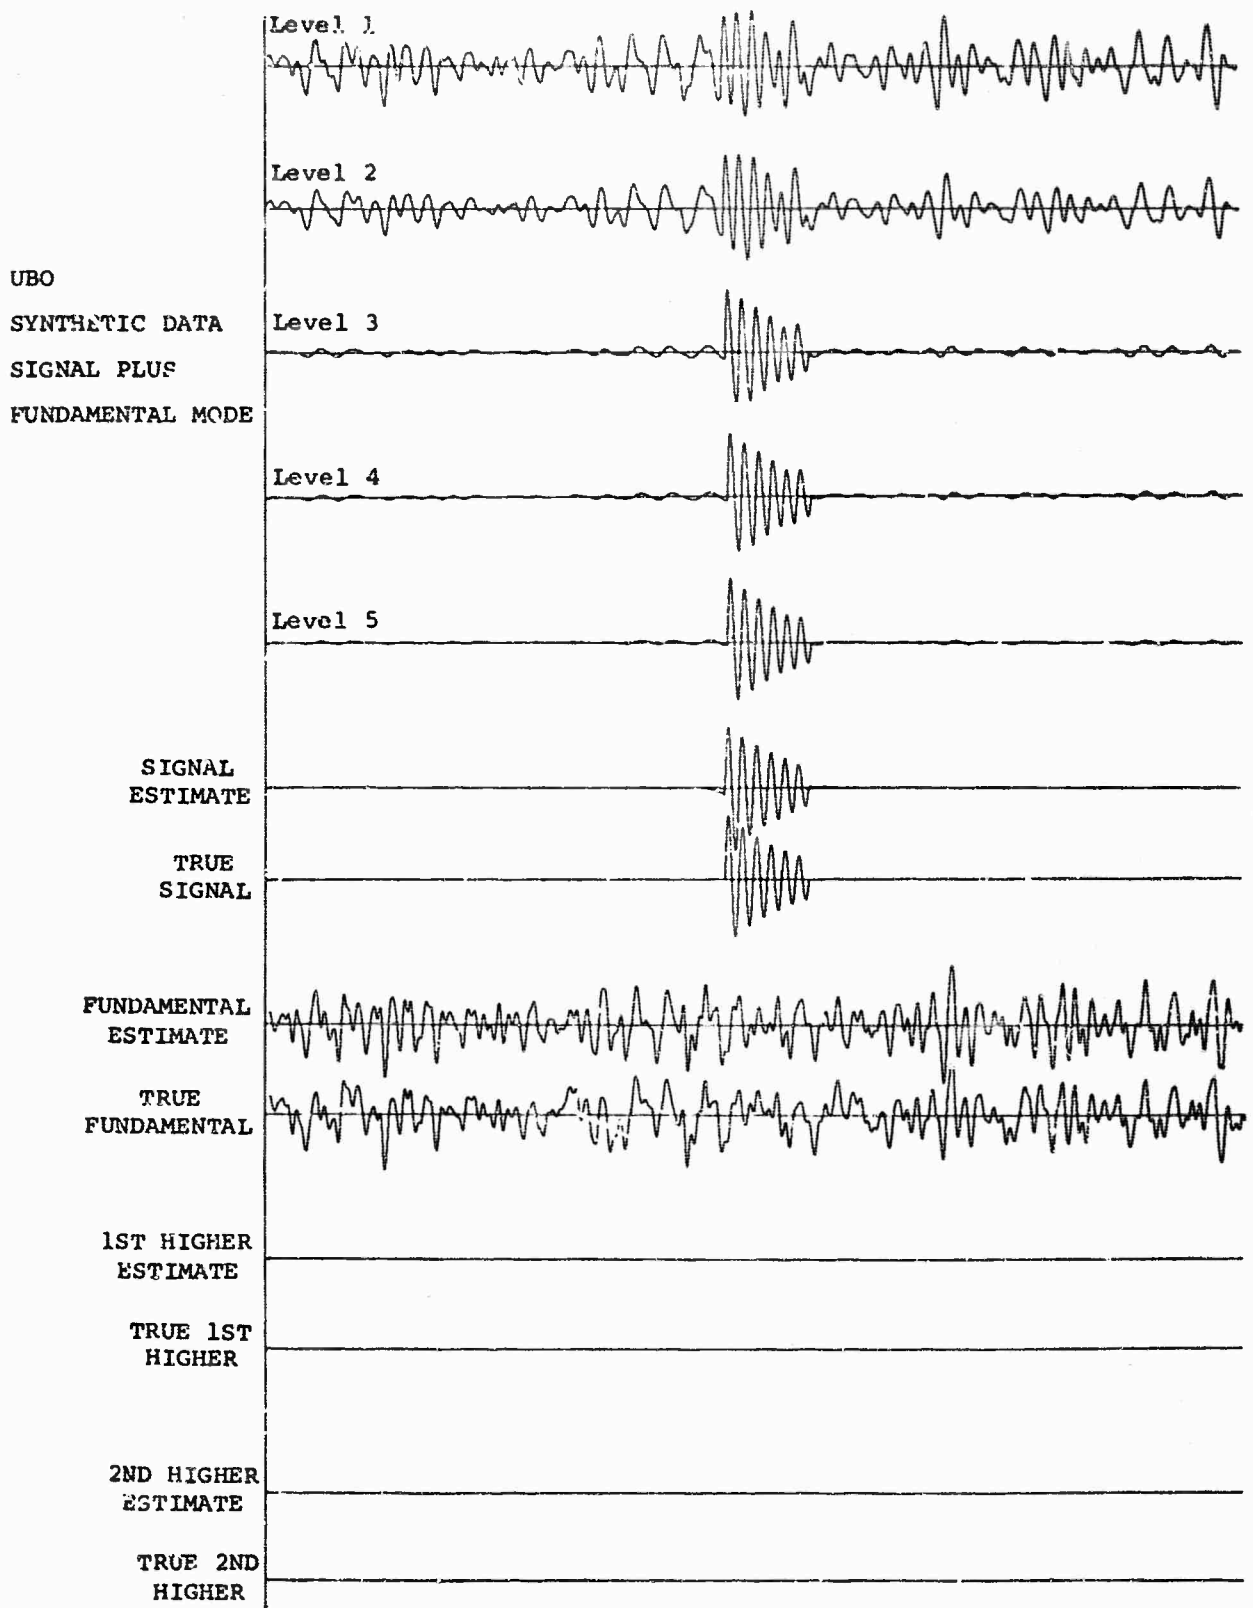


Figure 4. Optimum Filters Estimating Four Modes (The Signal and Three Rayleigh Modes) from Synthetic Data with Only Two Modes Present.

UBO
SYNTHETIC
DATA
SIGNAL PLUS
FUNDAMENTAL AND
1ST HIGHER MODE

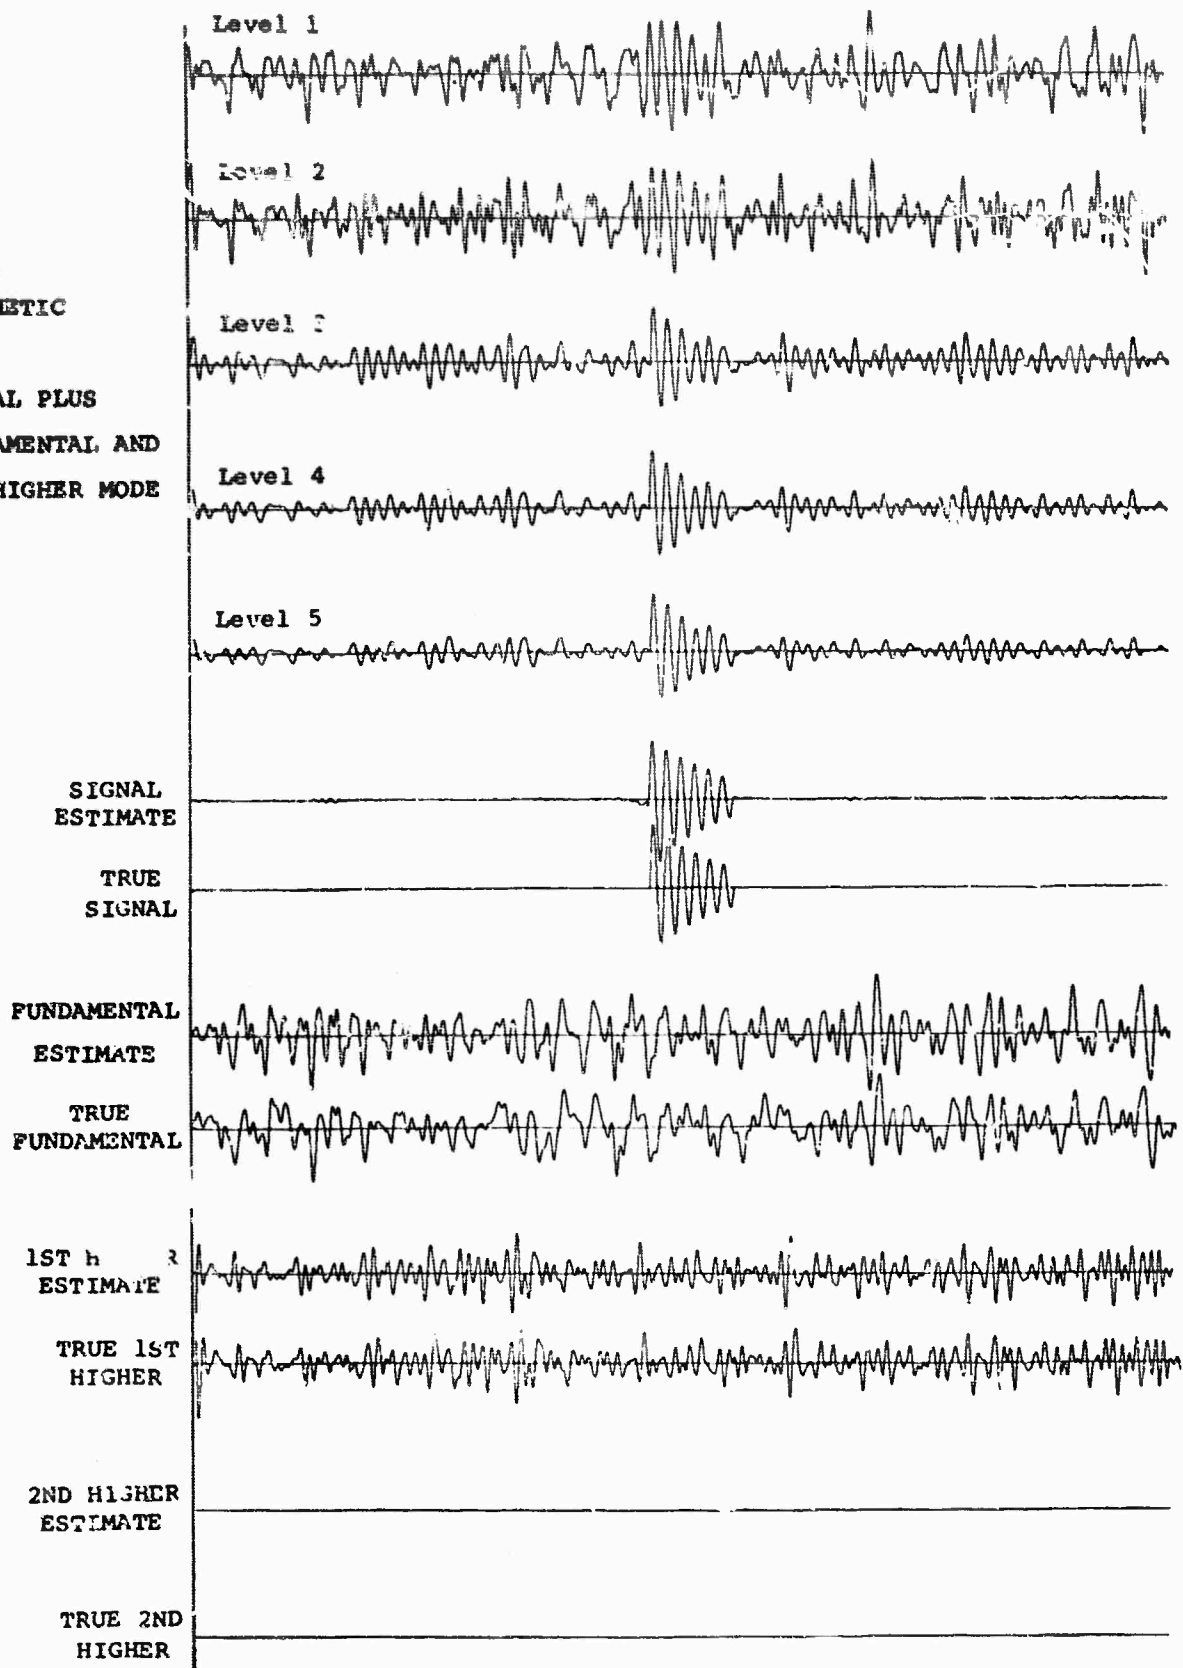


Figure 5. Optimum Filters Estimating Four Modes (the Signal and Three Rayleigh Modes) from Synthetic Data with only Three Modes Present.

UBO SYNTHETIC
DATA SIGNAL PLUS
FUNDAMENTAL AND
1ST AND 2ND HIGHER
MODES

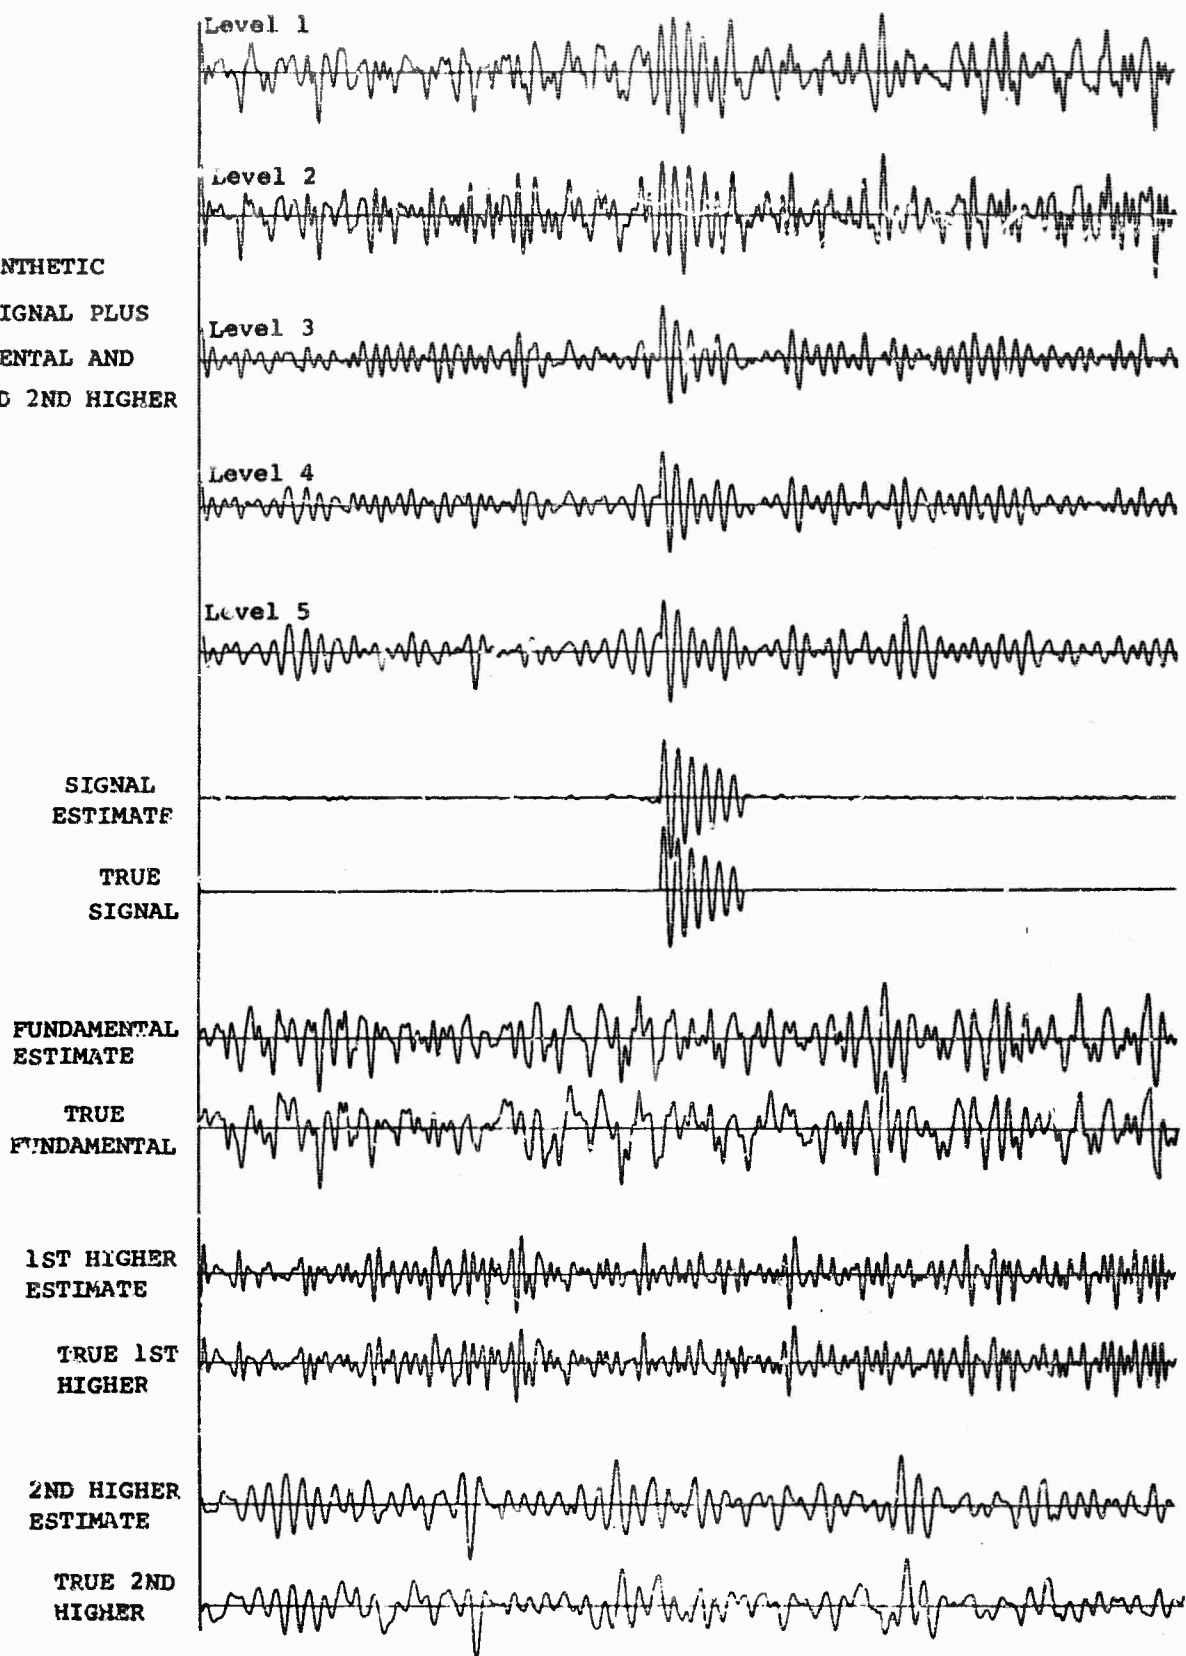


Figure 6. Optimum Filters Estimating Four Modes
(The Signal and Three Rayleigh Modes)
from Synthetic Data with all Four
Modes Present.

III. EXAMPLE WITH UBO NOISE AND A SYNTHETIC SIGNAL

We have seen that the optimum filters perform as expected when the data properties match the dispersion analysis of the well log. We must now apply these solutions to data recorded at the vertical array. To concentrate on Rayleigh mode suppression and reproduction, we have avoided complications which might be introduced by deghosting. Any signals recorded by this array will have ghost reflections. Consequently, we must add a synthetic signal, which satisfies our identical size and waveshape assumption, to the five-level noise output of the array. The first five traces on Figure 7 show the noise background and synthetic signal used in this test.

There are several sets of signal and noise mode estimates shown on Figure 7. All of the optimum filters used require inputs from all five levels. However, we can ask for estimates of only a single mode or for estimates of several modes in the filter outputs. We designate a five level input, two mode output set of filters as a 5×2 set. The more modes a set of filters estimate, the larger the filter gains will be. It follows that any errors resulting from incorrect dispersion analysis, instrument calibrations, or non-parallel layering will be amplified much more in these filters with fewer degrees of freedom.

The outputs on Figure 7 are from a 5×1 , 5×2 , 5×3 , and a 5×4 set of filters. The 5×1 set estimates the signal merely by averaging the inputs from all five levels. These outputs show progressively increasing low frequency errors on the estimates of all modes as the degrees of freedom decrease (i.e., as the number of outputs increase).

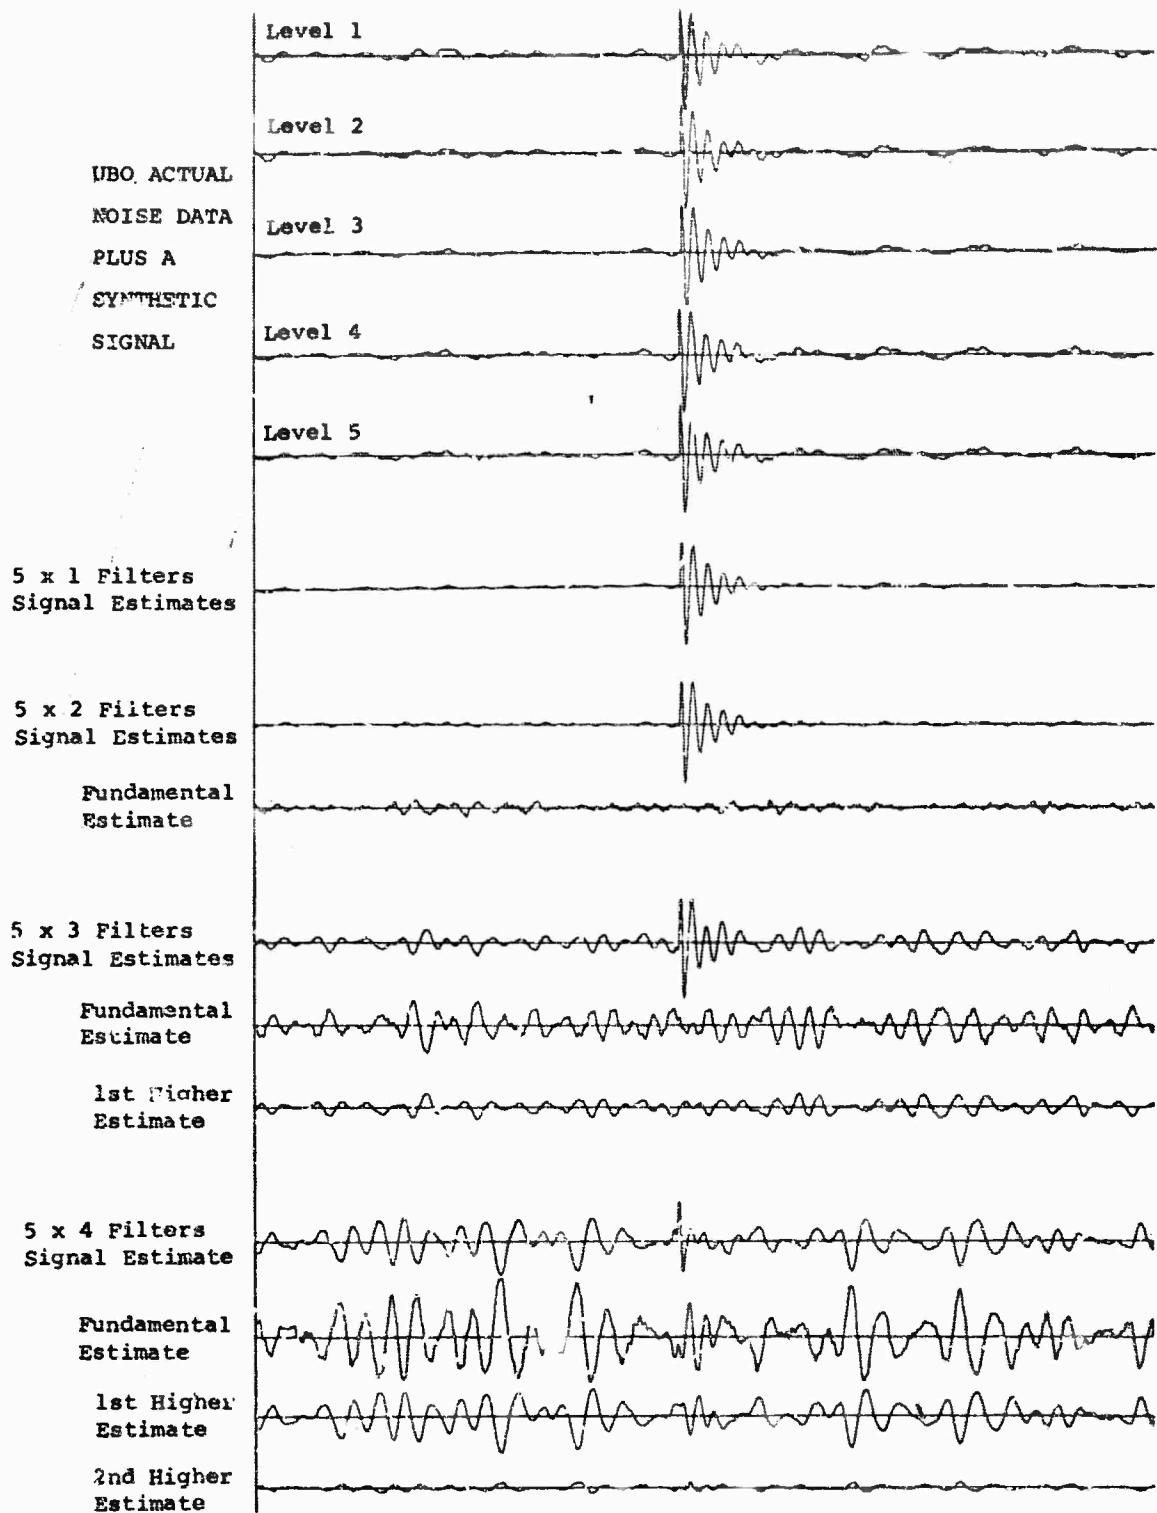


Figure 7. Several sets of optimum filters are applied to UBO noise data with a synthetic signal. The more modes a set of optimum filters estimates, the larger the filter gains, and the more errors are amplified. These data contain considerable energy below 0.5 cps for which the filters are not designed. As a result low frequency errors are large.

We know that the optimum filter solutions do not agree with the well analysis for frequencies below 0.5 cps. The well was not analyzed below this frequency. Rather the optimum filters were interpolated between 0 and 0.5 cps from the solution at 0.5 cps. Yet we expect the correct solutions to become more erratic as the array aperture measured in wavelengths becomes smaller. If the optimum filters were correct at all frequencies, and if the second higher mode were absent, as seems likely from the bottom trace on Figure 7; then the outputs from the 5 x 3 and the 5 x 4 filters would match.

IV. CONCLUSIONS

Qualitative experience has disclosed the following features of our optimum filter solutions:

1. These filters are indeed orthogonal and separate the noise and signal modes as planned.

2. These optimum filters extend for 400 points in time since the frequency interval chosen was .05 cps.

3. The gain on the synthetic examples was greater than 20 db with solutions restricted to 0.5 to 2.0 frequency range. More resolution in frequency could increase this figure.

4. The optimum filters are zero phase shift filters. Therefore, they are algebraically additive.

5. The optimum filters become larger in gains (both positive and negative) as degrees of freedom decrease.

6. The optimum filters become larger in gains (both positive and negative) as the aperture of array goes down. Thus, for low frequencies the solutions tend to become unstable.

7. Extra modes not considered and errors in assumptions cause errors in the output. Errors in assumptions can include an incorrect well log, non-parallel layering in surrounding medium, and incorrect calibrations of seismometers.

8. Extra degrees of freedom are needed to cut gains of optimum filters and make optimum solutions more tolerant of errors.

9. Extra degrees of freedom are best obtained by increasing the number of seismometers in the vertical array.

10. More stable solutions (i.e., optimum filters with lower gain) will be obtained from the deeper vertical arrays which have the seismometers distributed rather uniformly throughout the array.

We will evaluate these properties of vertical α rays quantitatively as the study progresses. We will also add deghosting to the optimum filter programs.

The next vertical array of interest is the one in the Grapevine well, GVTX. This array has six seismometers down-hole plus a surface instrument all recorded on the same tape. In addition it is located in a sedimentary basin rather than the Rocky Mountains so the assumption of plane, horizontal layering may be better satisfied.

REFERENCES

1. Haskell, N.A., 1953, The dispersion of surface waves on multilayered media: Bull. Seism. Soc. Amer., v. 43, p. 17-34.
2. Press, F., Harkrider, D., and Seafeldt, C.A., 1961, A fast convenient program for computation of surface-wave dispersion curves in multilayered media: Bull. Seism. Soc. Amer., v. 51, p. 495-502.
3. Archambeau, C.B., Alexander, S.S., and Biehler, E.E., 1963, Identification and elimination of microseism noise at depth using theoretical Rayleigh wave and observed noise displacement: Supplement to Final Report, Project T/1129, prepared for Headquarters, United States Air Force under Contract AF 33(600)-42890 by United ElectroDynamics, Inc.
4. Dorman, J., and Prentiss, D., 1960, Particle amplitude profiles for Rayleigh waves on a heterogeneous earth: Jour. Geoph. Res. v. 65, p. 3805-3816.
5. Sax, R.L. and Hartenberger, R.A., Oct. 1964, Theoretical Prediction of Seismic Noise in a Deep Borehole, Geophysics, Vol. XXIX, No. 5, p. 714-720.
6. Rosenbaum, J.H., 1964, A note on the computation of Rayleigh-wave dispersion curves for layered elastic media: Bull. Seis. Soc. Amer., v. 54, p. 1013-1019.

BLANK PAGE

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) TELEDYNE INDUSTRIES, INC. EARTH SCIENCES DIVISION ALEXANDRIA, VIRGINIA 22314		2a. REPORT SECURITY CLASSIFICATION Unclassified	
3. REPORT TITLE RAYLEIGH WAVE REJECTION BY OPTIMUM FILTERING OF VERTICAL ARRAYS		2b. GROUP --	
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Scientific			
5. AUTHOR(S) (Last name, first name, initial) Dean, William C.			
6. REPORT DATE 7 October 1966	7a. TOTAL NO. OF PAGES 21	7b. NO. OF REFS 6	
8a. CONTRACT OR GRANT NO. AF 33(657)-15919	8b. ORIGINATOR'S REPORT NUMBER(S) SDL Report No. 166		
a. PROJECT NO. VELA T/6702	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) --		
c. ARPA Order No. 624			
d. ARPA Program Code No. 5810			
10. AVAILABILITY/LIMITATION NOTICES This document is subject to special export controls and each transmittal to foreign governments or foreign national may be made only with prior approval of Chief, AFTAC.			
11. SUPPLEMENTARY NOTES --		12. SPONSORING MILITARY ACTIVITY ADVANCED RESEARCH PROJECTS AGENCY NUCLEAR TEST DETECTION OFFICE WASHINGTON, D. C.	
13. ABSTRACT Optimum array processes such as the maximum likelihood filters are usually derived from the cross correlation matrix of the time series outputs of the array. With a vertical array, however, the correlations of both the incoming P-wave signals and Rayleigh wave noise are predictable from the structure. This paper presents the theory of maximum likelihood filters in vertical arrays which can provide undistorted estimates of the signal or the various Rayleigh modes with the other modes canceled out. The performance of these optimum processes will be dependent upon the validity of the underlying assumptions such as horizontal bedding, known instrument calibration, and knowledge of both P and S velocities with depth. Examples are shown of the performance of the optimum filters using synthesized data where the underlying assumptions are satisfied. Then these same optimum filters are applied to data from the UBO vertical array.			

14 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Optimum Filters						
Vertical Arrays						
Maximum-Likelihood Filters						
Rayleigh Wave Dispersion						
Multiple Channel Filtering						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parentheses immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.